

FIG. 1

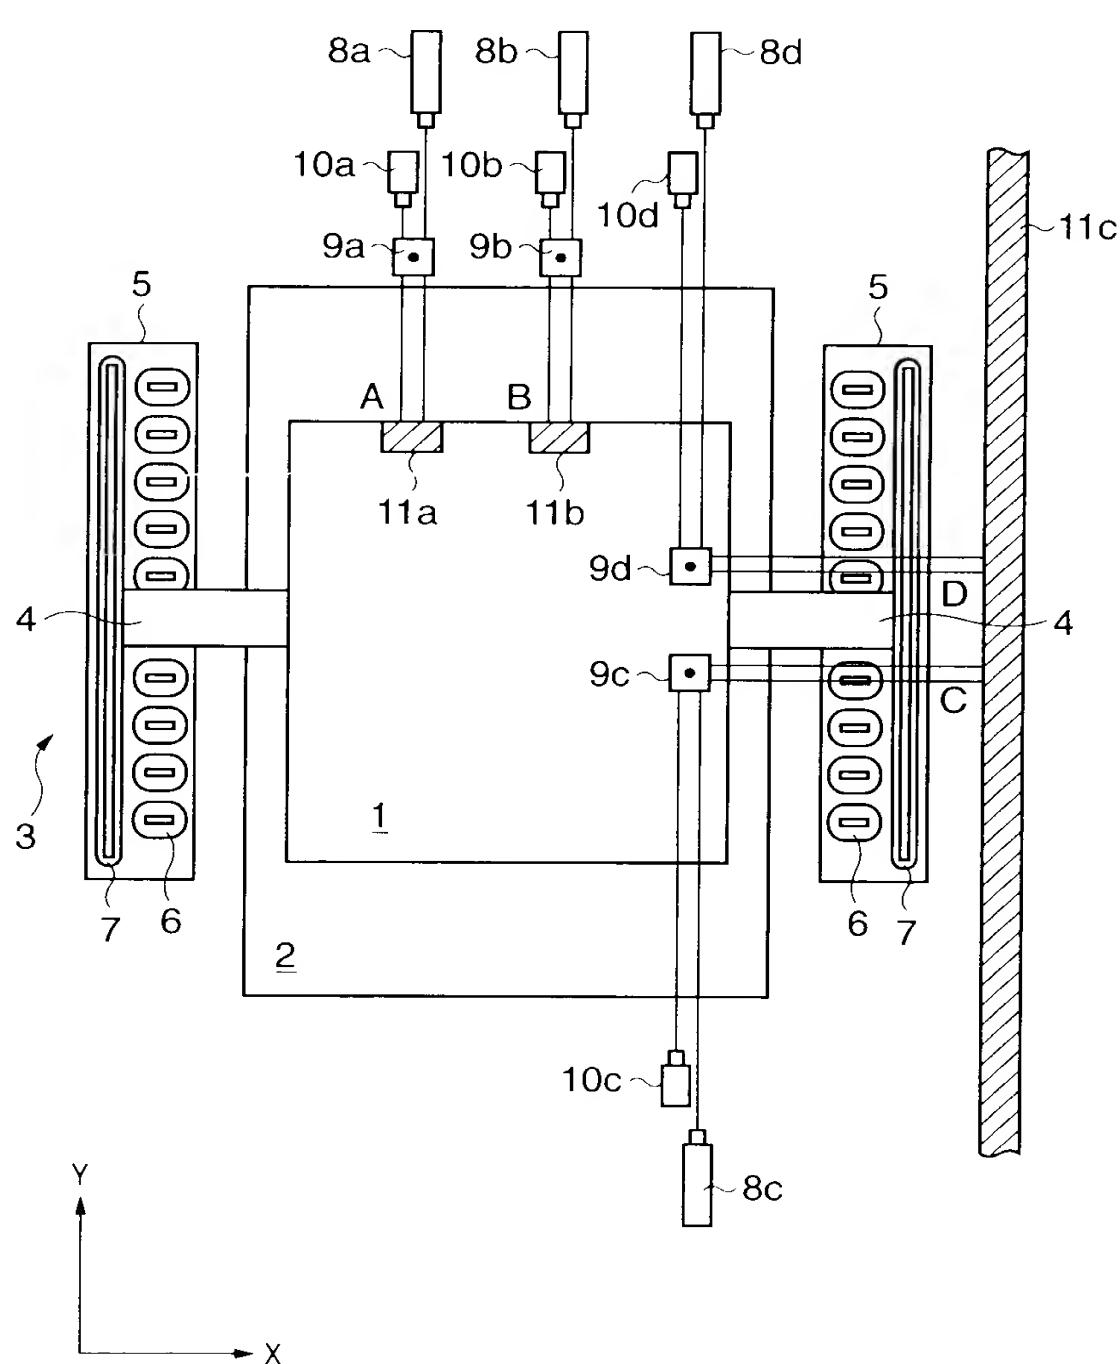


FIG. 2

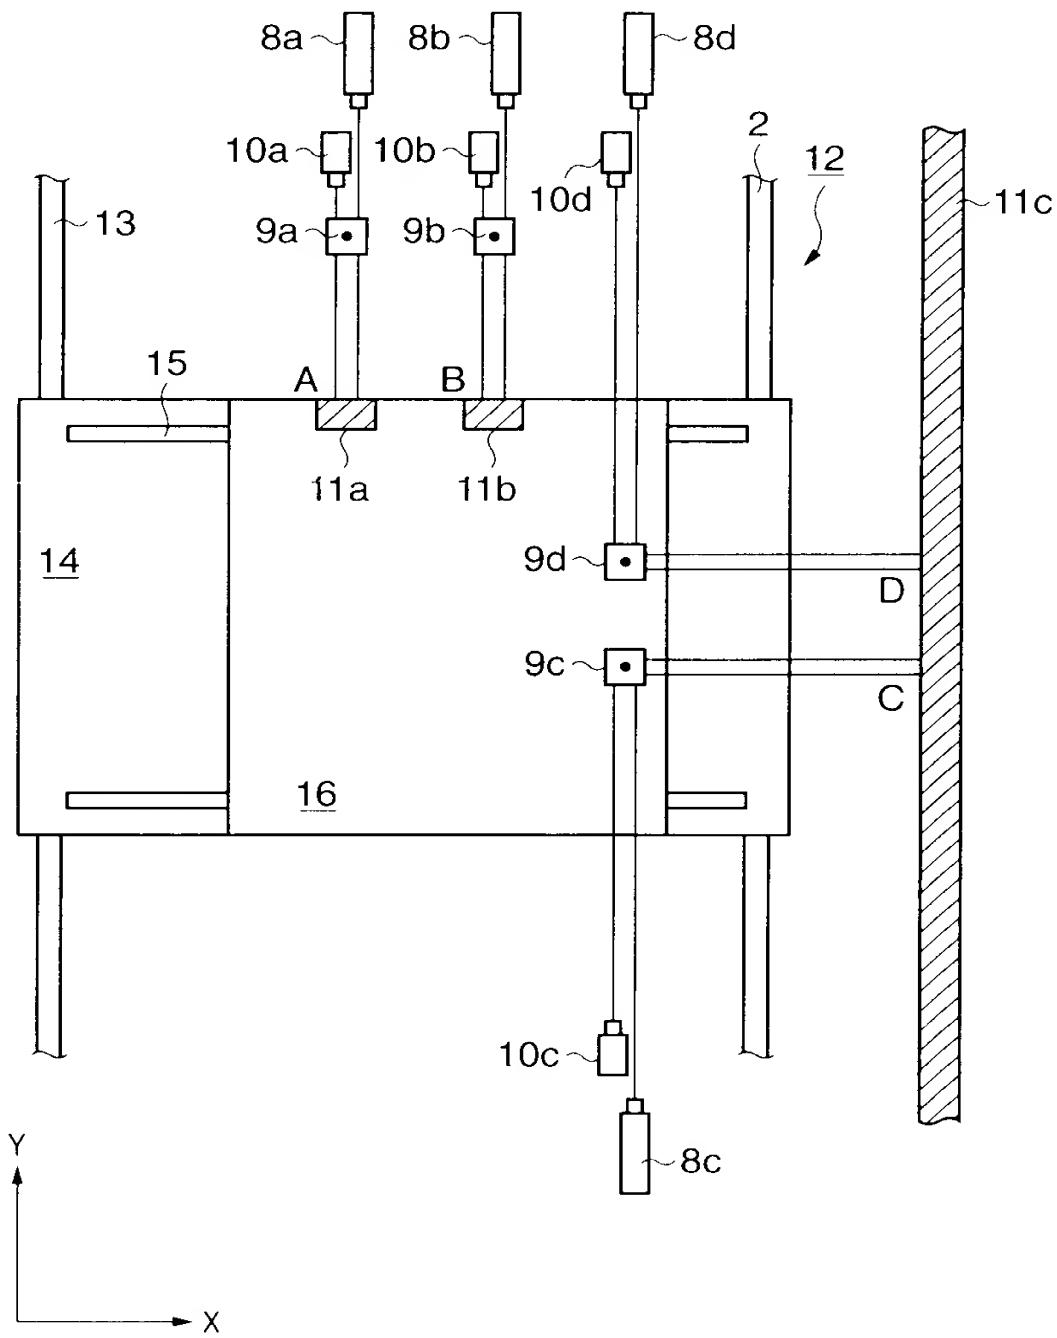


FIG. 3A

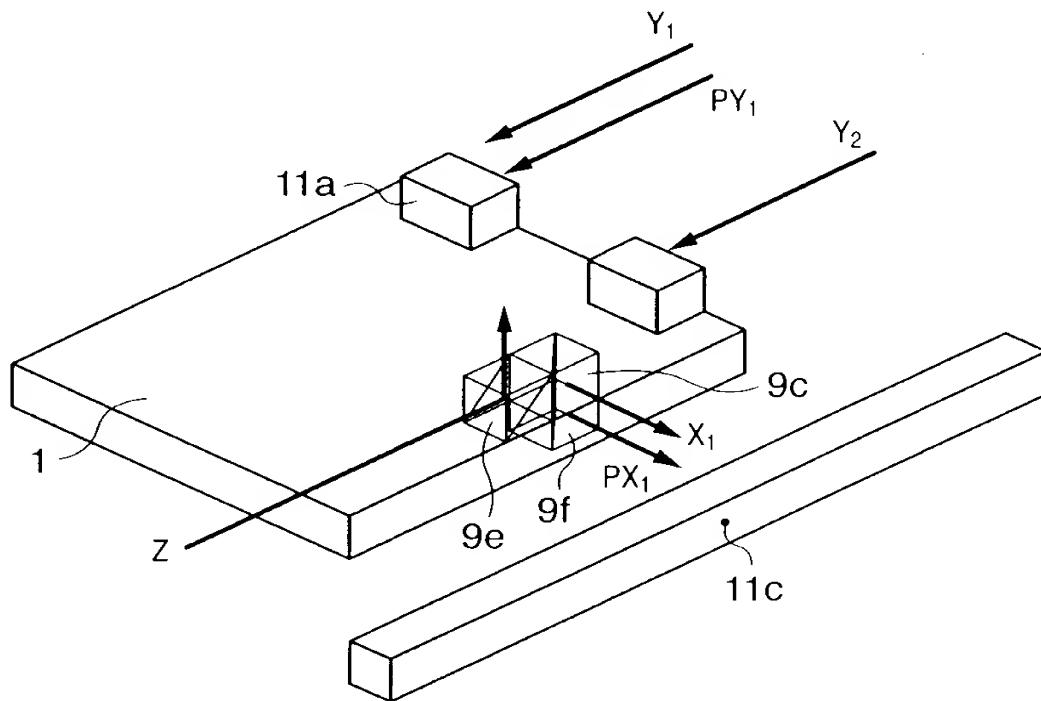


FIG. 3B

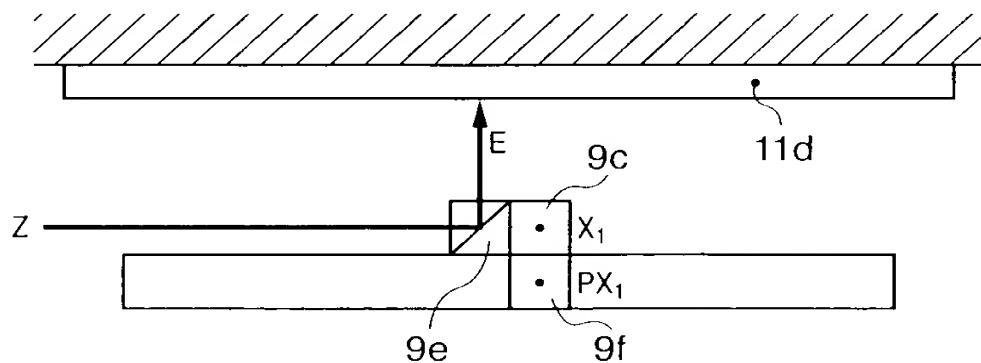


FIG. 4

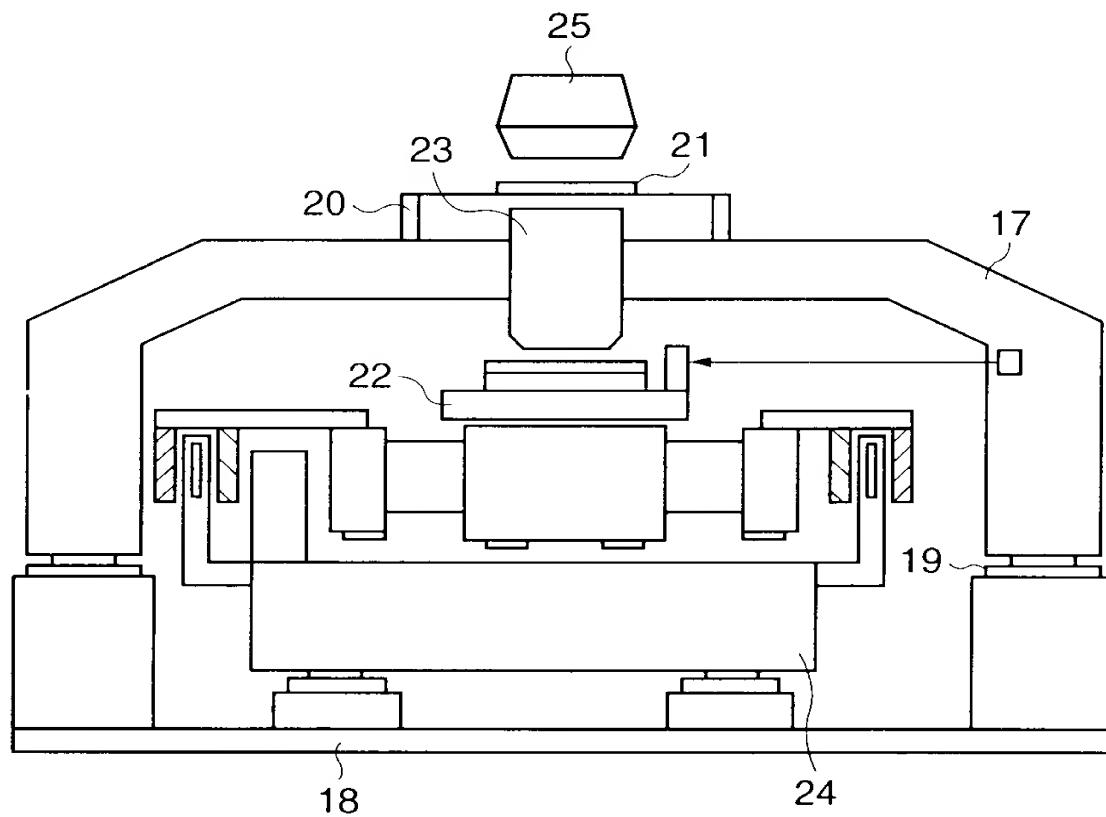


FIG. 5

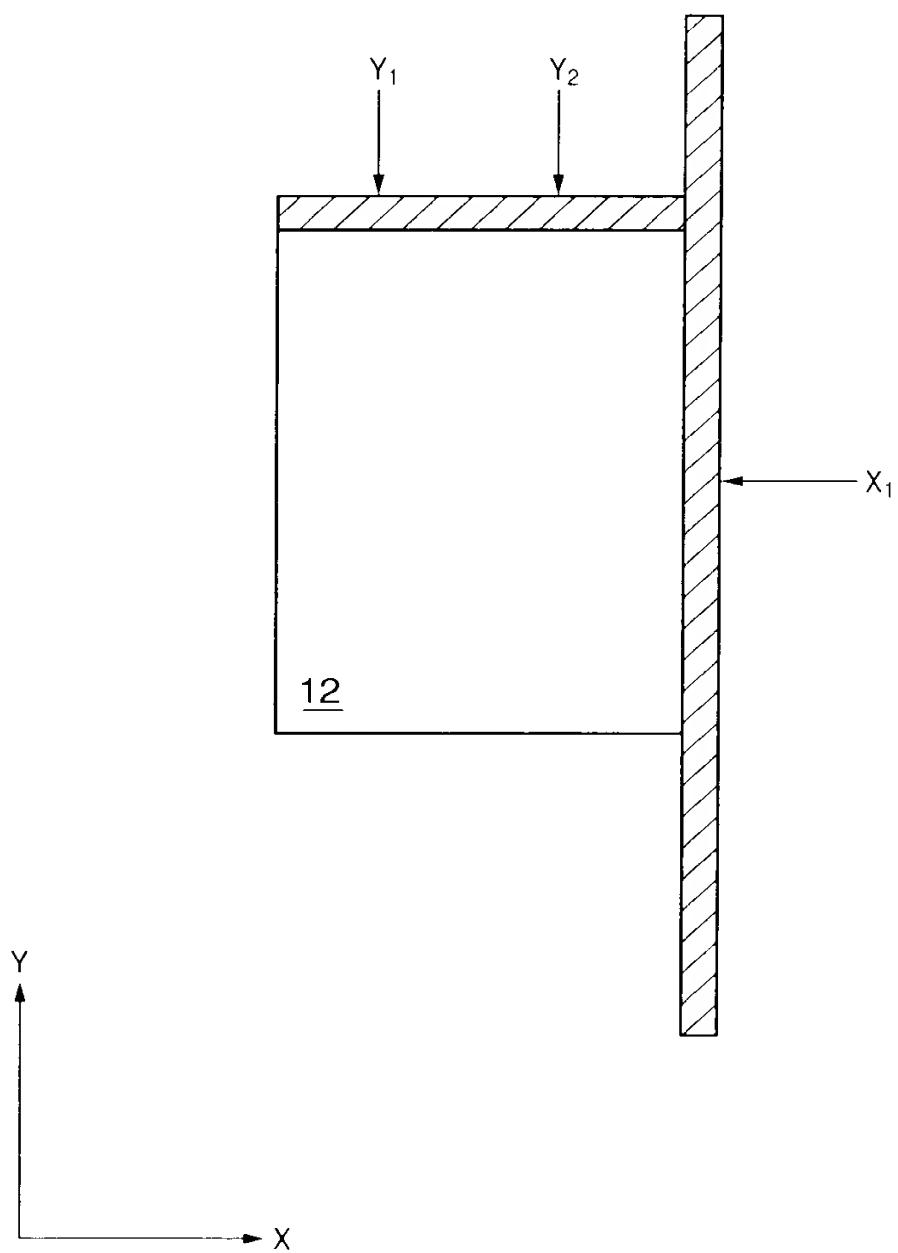


FIG. 6

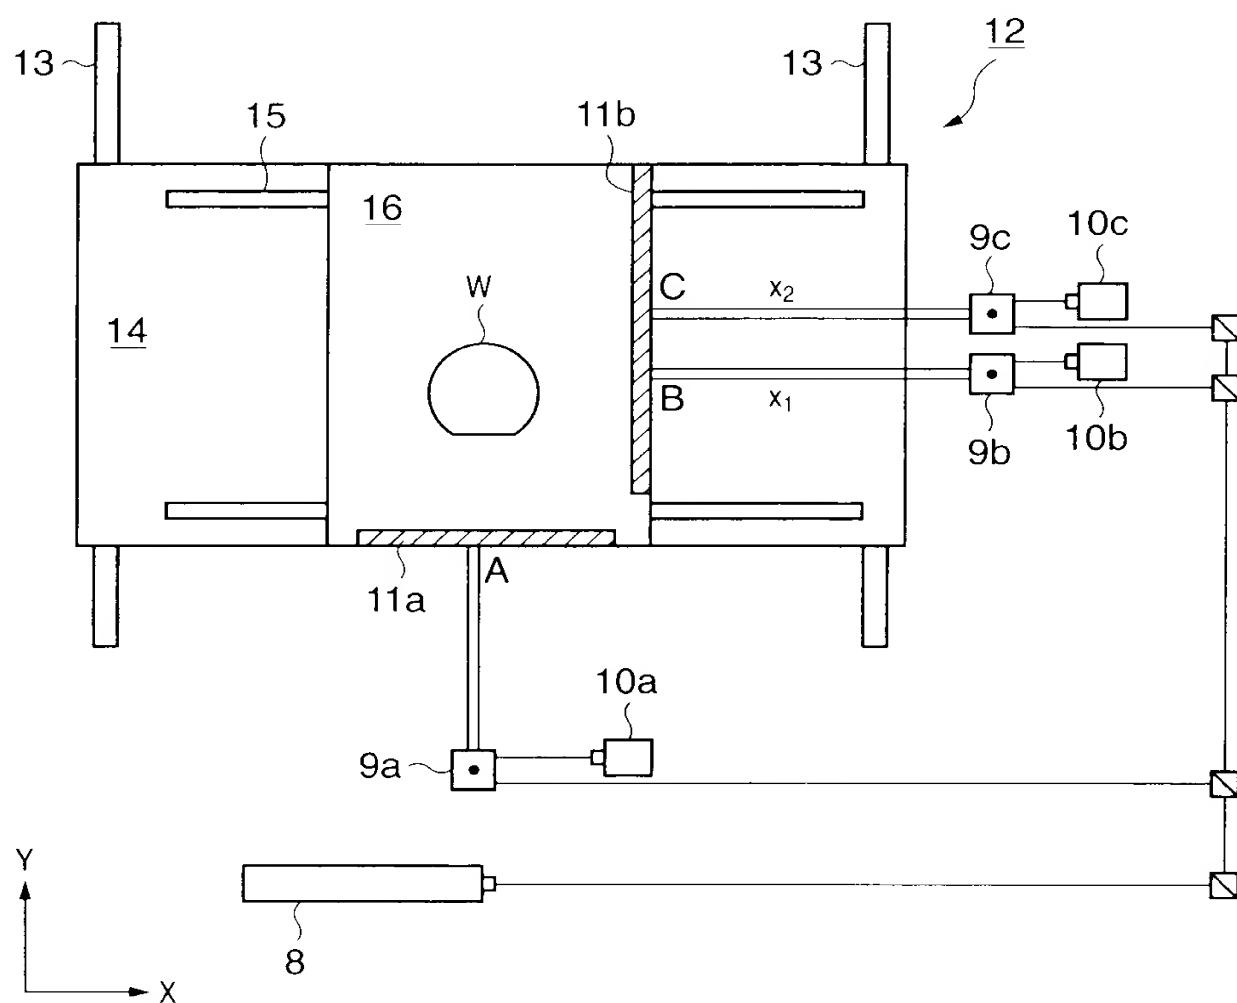


FIG. 7

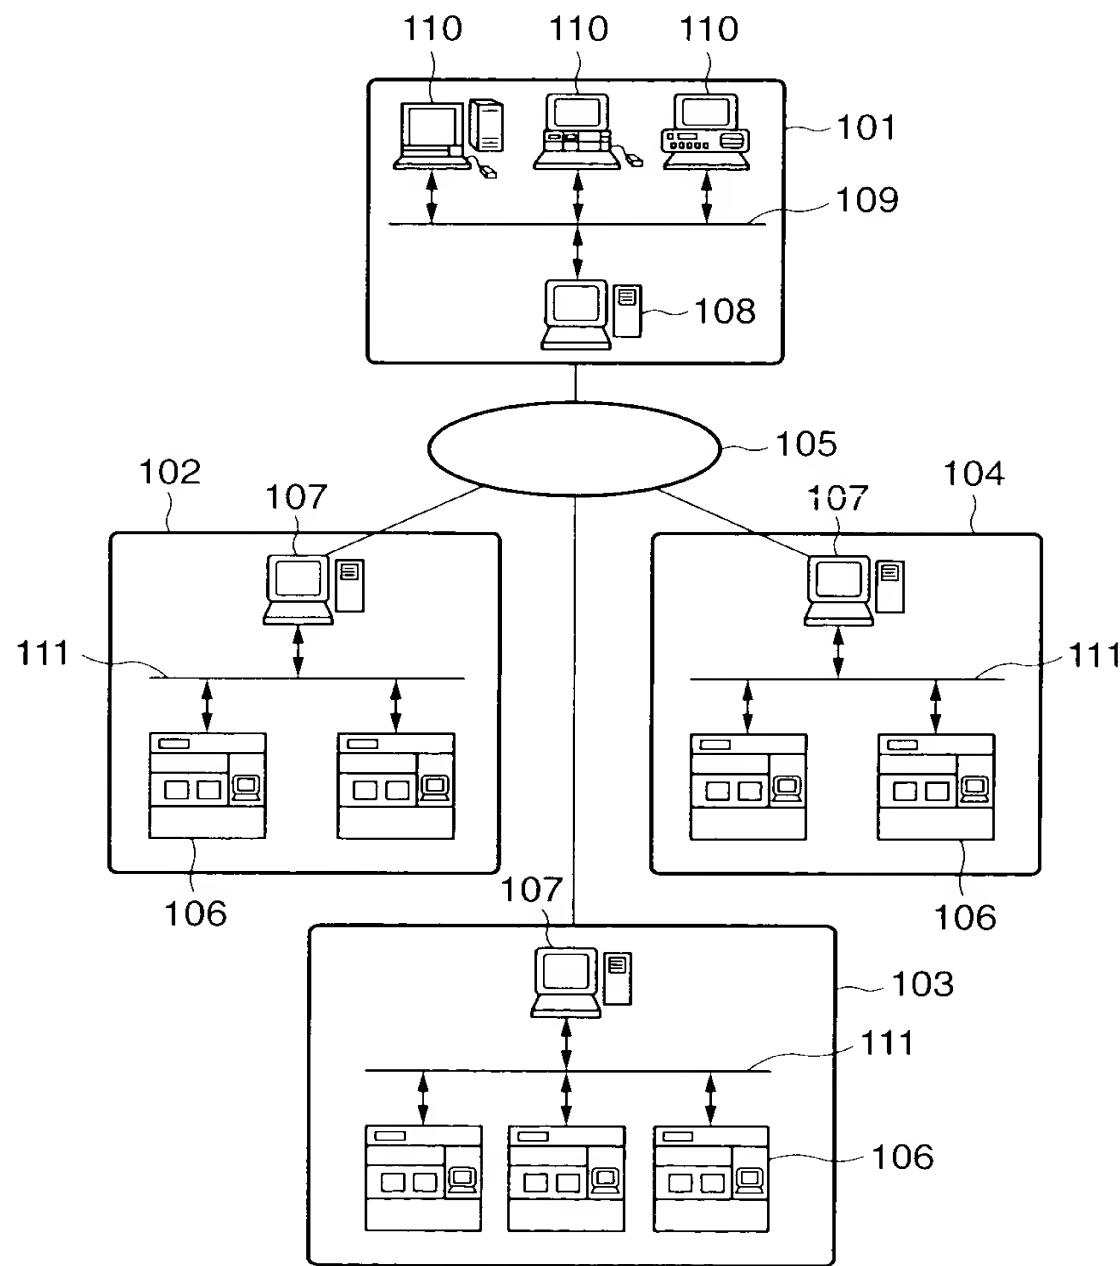


FIG. 8

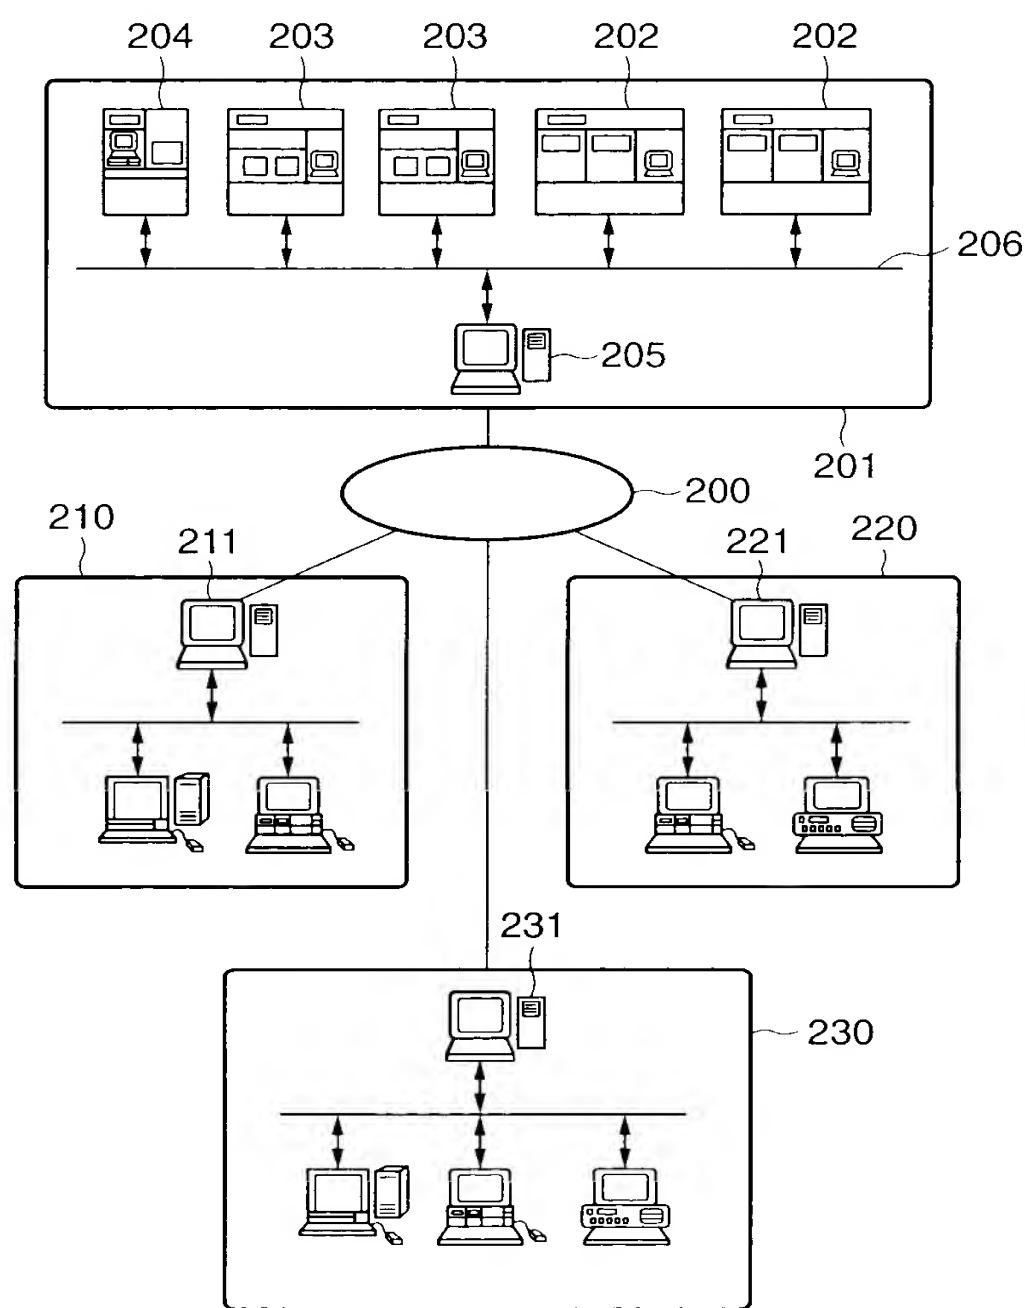


FIG. 9

URL <http://www.maintain.co.jp/db/input.html>

TROUBLE DB INPUT WINDOW


OCCURRENCE DATE 404


TYPE OF APPARATUS 401


SUBJECT 403

APPARATUS S/N 402

DEGREE OF URGENCY 405

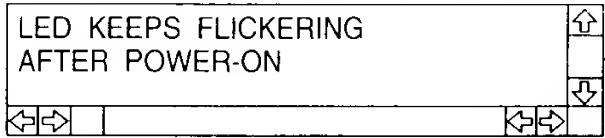SYMPTOM
AFTER POWER-ON 406

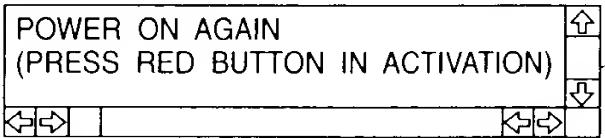
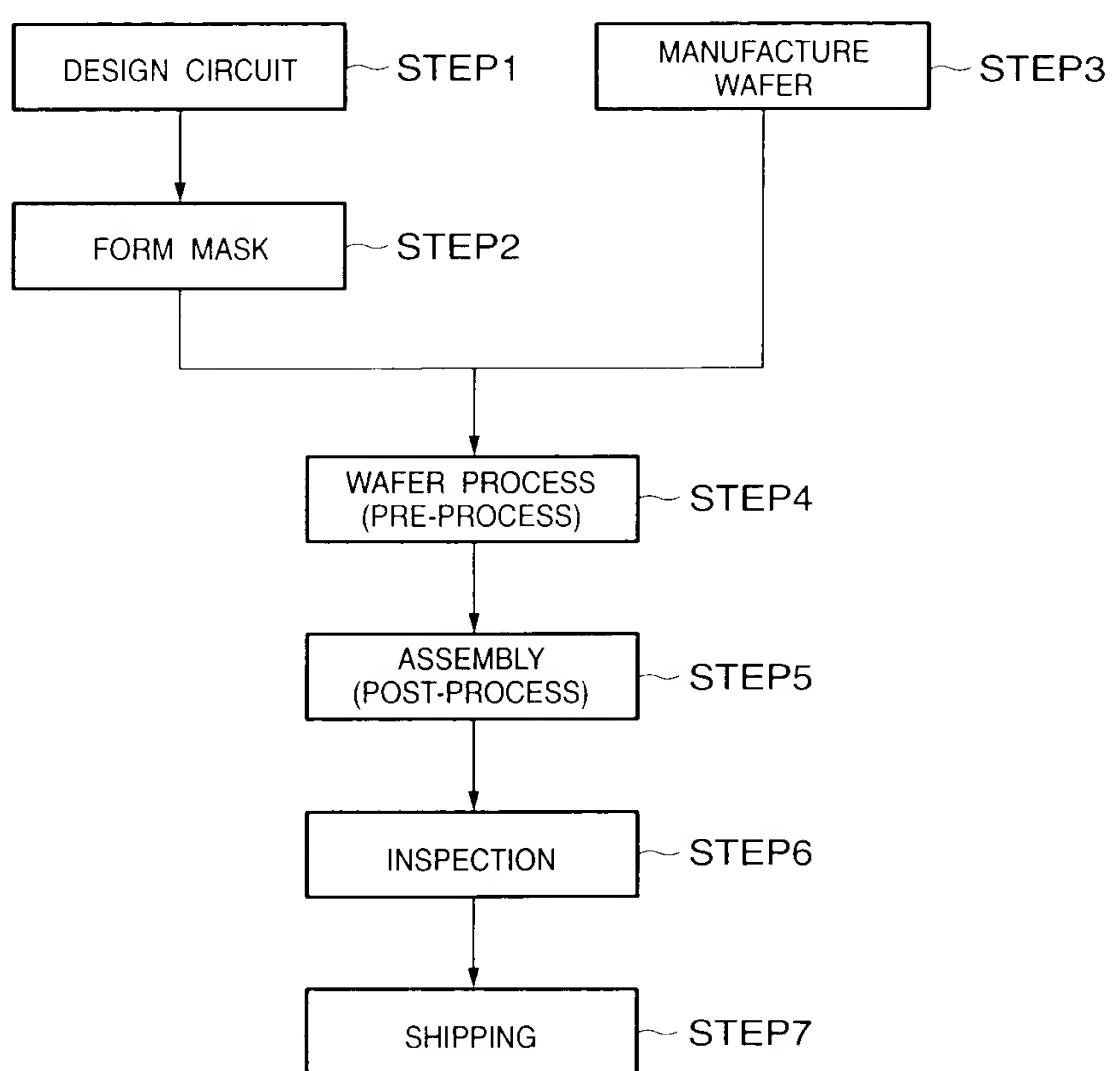
REMEDY
(PRESS RED BUTTON IN ACTIVATION) 407

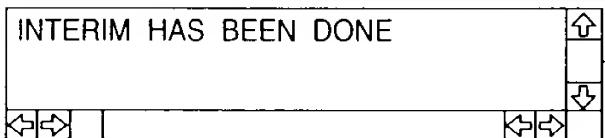
PROGRESS
408


410 411 412

[LINK TO RESULT LIST DATABASE](#) [SOFTWARE LIBRARY](#) [OPERATION GUIDE](#)

FIG. 10



SEMICONDUCTOR DEVICE MANUFACTURING FLOW

FIG. 11

